

3 Port Add/ Drop Module CWDM-15

Especially designed for CWDM networks, Santec's CWDM-15 units are optimized for wide-pass band and low loss to reduce costs and extend reach in Metro and Access equipment. Standard CWDM 20nm channel spacing is available.


Fully tested for long term reliability these units boast high isolation as well as low insertion loss.

Features


- ▶ Wide Operation Range: 1290-1350nm, 1470-1610nm
- ▶ Low Insertion Loss
- ▶ Wide Pass Band
- ▶ High Channel Isolation
- ▶ Operating Temperature: -10 to 70°C
- ▶ Long Term Reliability
- ▶ Telcordia-GR-1221 Qualified

Applications

- ▶ Optical Add Drop Multiplexer
- ▶ Metro/Access Network system
- ▶ FTTH & FTTC
- ▶ CATV Applications

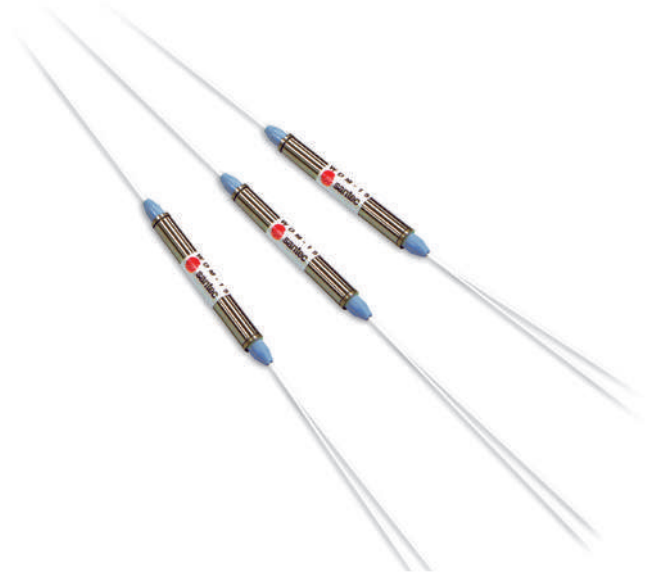

Dimensions

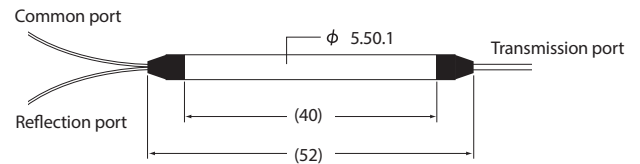

Unit: mm

Wavelength

1291nm	1311nm	1331nm	1351nm
1471nm	1491nm	1511nm	1531nm
1551nm	1571nm	1591nm	1611nm

■ Typical Performance

Specification	Units	Condition	Min.	Max.
Wavelength range	nm	20nm channel spacing	-	-
Operating temperature	°C	-	-10	70
Insertion loss (Transmission)	dB	@lc6.5nm	-	0.8
Insertion loss (Reflection)	dB	@l<lc-13.5nm, l>lc+13.5nm	-	0.4
Flatness	dB	@lc6.5nm	-	0.4
Adjacent channel isolation (Transmission)	dB	@lc13.5nm	30	-
Non-adjacent channel isolation	dB	@lc33.5nm	45	-
Directivity	dB	-	45	-
PDL	dB	@center wavelength: lc	-	0.1
Return loss	dB	-	50	-

*1 All parameters are specified over operating temperature range.

*2 Insertion loss per filter includes Ripple and PDL, without connectors.

*3 Please contact santec to discuss specific performance requirements.

■ Ordering Code

CWDM-15 - A - B - C - D/E

A=Channel

1=1 ch

B=Type

D=Drop

1=Standard, 5=Low Loss

C=Fiber Length

10=1.0m, 20=2.0m

D=Connector

00=No Connector, FS=FC-SPC, FA=FC-APC, SS=SC-SPC, SA=SC-APC

MU=MU-SPC, MJ=MUJ-SPC, LC=LC-SPC

E=Center Wavelength

(ex) 1571nm --->1571

www.santec.com/en/

2023© Santec AOC corporation santec reserves the right to make changes in equipment design, components or specifications without notice.



Santec Japan Corporation

5823 Ohkusa-Nenjozaka, Komaki, Aichi 485-0802, Japan Tel. +81-568-79-3536 Fax +81-568-79-1718

Santec USA Corporation

400 Kelby Street Suite 1501, Fort Lee, NJ 07024, USA Toll Free +1-800-726-8321(santec-1) Tel. +1-201-488-5505 Fax +1-201-488-7702

Santec Europe Ltd.

99 Park Drive Milton Park, Abingdon Oxfordshire, OX14 4RY, U.K. Tel. +44-20-3176-1550

Santec (Shanghai) Co., Ltd.

21F Room H, Hua Du Bldg., No.838 Zhangyang Road, Pudong District, Shanghai 200122 China Tel: +86-21-58361261, Fax: +86-21-58361263