


# MEMS Attenuator with PMF PM-MOVA

Our MEMS (Micro Electro Mechanical Systems) based attenuator is available in a range of specifications for any DWDM application and PM-MOVA is manufactured with PMF (Polarization Maintaining Fiber). Optical properties are excellent with good PER and wavelength dependence. Santec's tilting mirror design coupled with laser welded packaging ensures a reliable, stiction-free device.

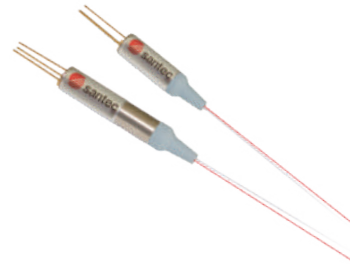

## features

- ▶ Low loss, Low WDL
- ▶ Low Power Consumption
- ▶ Bright and Dark Type Available
- ▶ World Smallest Package Available (13mm length)
- ▶ Telcordia GR-1221 Qualified
- ▶ RoHS Compliant

## Specifications

Parameter	Unit		Spec	Note
Wavelength Range	-	nm	1530 to 1570	C band
			1570 to 1610	L band
Insertion Loss	Max.	dB	1.0	w/o connectors
Polarization Extinction Ratio	Min.	dB	15	All operating conditions
Max. Attenuation	Max.	dB	30	-
Response Time	Max.	msec	10	10-90%
Input Optical Power	Max.	dBm	25	-
Drive Voltage	Max.	V	20	-
Storage Temperature Range	-	degC	-40 to 85	Non condensation
Operating Temperature Range	-	degC	-5 to 70	Non condensation
Fiber Type	-	-	PMF	Fiber length : 1.0+/-0.1m

[www.santec.com/en/](http://www.santec.com/en/)

2023© Santec AOC corporation santec reserves the right to make changes in equipment design, components or specifications without notice.



**Santec Japan Corporation**  
5823 Ohkusa-Nenjozaka, Komaki, Aichi 485-0802, Japan Tel. +81-568-79-3536 Fax +81-568-79-1718

**Santec USA Corporation**  
400 Kelby Street Suite 1501, Fort Lee, NJ 07024, USA Toll Free +1-800-726-8321(santec-1) Tel. +1-201-488-5505 Fax +1-201-488-7702

**Santec Europe Ltd.**  
99 Park Drive Milton Park, Abingdon Oxfordshire, OX14 4RY, U.K. Tel. +44-20-3176-1550

**Santec (Shanghai) Co., Ltd.**  
21F Room H, Hua Du Bldg., No.838 Zhangyang Road, Pudong District, Shanghai 200122 China Tel: +86-21-58361261, Fax: +86-21-58361263