


Fiber-Pigtailed Photo Detector PDA

The PDA is an optical power monitoring device consisting of terminating photo detectors that are integrated with fiber inputs. The PDA is very compact and is easily mounted on PCB for system use.

The PDA provides a simple and low cost solution for power monitoring at DWDM and amplifier systems.

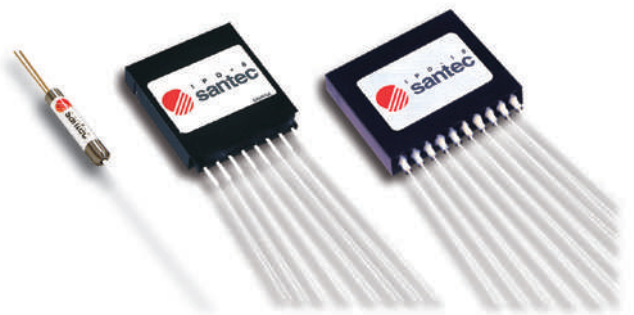


Features

- ▶ High Quality (GR-468-CORE Qualified)
- ▶ Excellent Characteristics
- ▶ Compact Design
- ▶ Minimum Fiber Bending Radius of 5mm is available


Applications

- ▶ Power and Channel Monitoring for WDM Systems
- ▶ Power Monitoring in any optical communications

Configuration

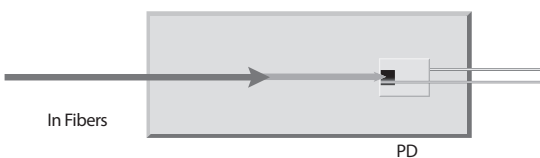

Dimensions

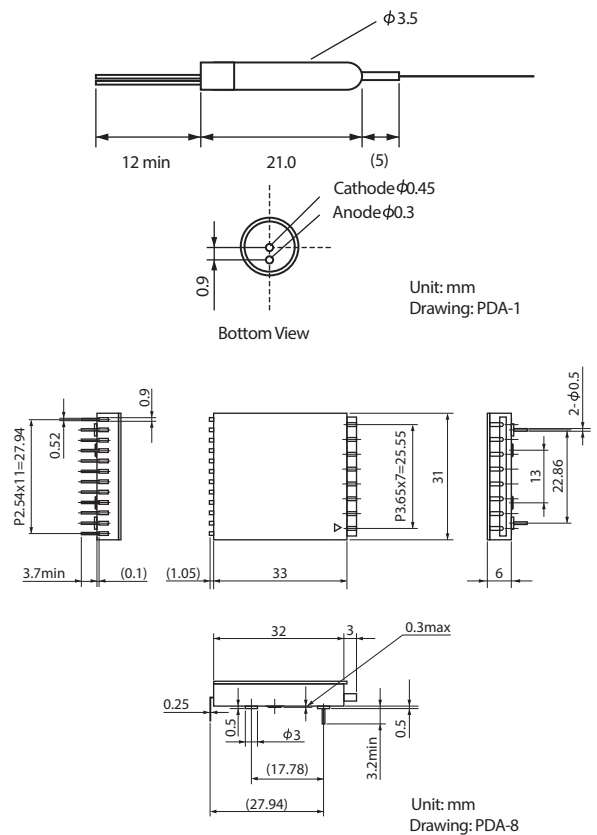

■ Specifications

Parameter	Unit		Specifications	Notes
Return Loss	Min.	dB	45	-
PD Responsivity	Min.	mA/W	800	All operating conditions, 5V bias
Dark Current	Max.	nA	5	70°C, 5V bias
Reverse Voltage	Max.	V	10	-
Forward Current	Max.	mA	5	-
Wavelength Range	-	nm	1510 to 1610	-
Storage Temperature Range	-	°C	-40 to 85	RH: 85% (Max.), Non-condensation
Operating Temperature Range	-	°C	0 to 70	RH: 85% (Max.), Non-condensation
Input Optical Power	Max.	dBm	+3	-
Fiber Length	Min.	mm	1000	0.25mm coating SMF
Dimension	-	mm	3.5(D)x 21(L)	PDA-1
			31 x 32 x 6	PDA-8
			39 x 32 x 6	PDA-10

■ Ordering Code

PDA - A - B - C

A=Channel

1=1ch, 4=4ch, 8=8ch, 10=10ch

B=Connector

00=No Connector

SC=SC-SPC, MU=MU-SPC, LC=LC-SPC

* For other connectors, please contact us.

C=Pin Assignment

Single Type: 2P=2pinPD

Array Type: AC=Anode Common, CC=Cathode Common

www.santec.com/en/

2023© Santec AOC corporation santec reserves the right to make changes in equipment design, components or specifications without notice.



Santec Japan Corporation

5823 Ohkusa-Nenjozaka, Komaki, Aichi 485-0802, Japan Tel. +81-568-79-3536 Fax +81-568-79-1718

Santec USA Corporation

400 Kelby Street Suite 1501, Fort Lee, NJ 07024, USA Toll Free +1-800-726-8321(santec-1) Tel. +1-201-488-5505 Fax +1-201-488-7702

Santec Europe Ltd.

99 Park Drive Milton Park, Abingdon Oxfordshire, OX14 4RY, U.K. Tel. +44-20-3176-1550

Santec (Shanghai) Co., Ltd.

21F Room H, Hua Du Bldg., No.838 Zhangyang Road, Pudong District, Shanghai 200122 China Tel: +86-21-58361261, Fax: +86-21-58361263